



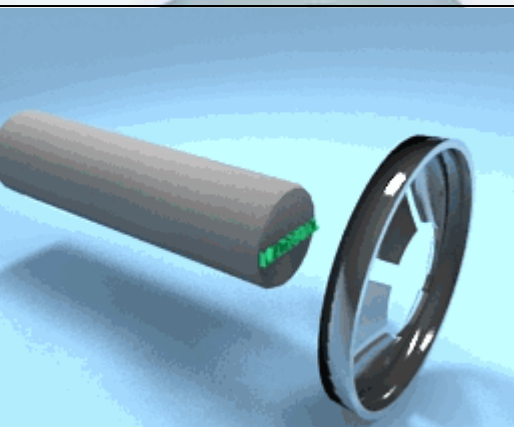

Golillas Aranlock

Carbono máx. 0,75
Fósforo máx. 0,04

Manganeso: 0,60 - 0,90
Azufre máx. 0,50

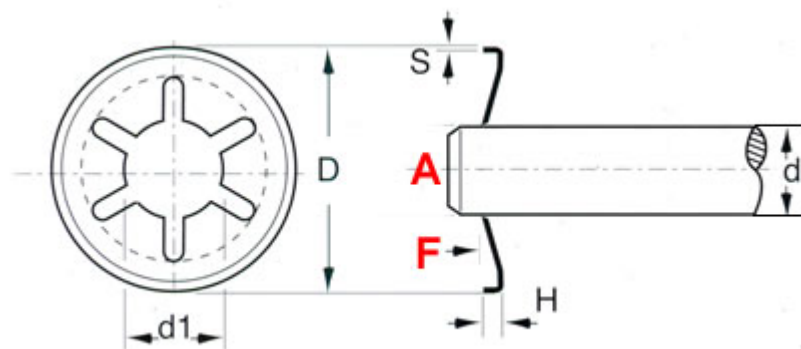

MEDIDA DE ARANLOCK

Diámetros Ejes "d" en		Diám. exterior	Agujero			Ranura
mm	pulg.	D	d1	H	S	Nº
3.00		10.0				
3.00	-	11.3	2.60/2.70	1.2/1.6	0.2	6
3.17	1/8	11.3	2.70/2.80	1.2/1.6	0.2	6
4.00	5/32	11.3	3.50/3.65	1.2/1.6	0.2	6
4.76	3/16	11.3	4.30/4.45	1.2/1.6	0.2	6
5.00	.	11.3	4.50/4.65	1.2/1.6	0.2	6
4.00	5/32	15.0	3.50/3.65	1.4/1.8	0.3	6
5.00	-	15.0	4.50/4.65	1.4/1.8	0.3	6
6.00	-	15.0	5.50/5.65	1.4/1.8	0.3	6
6.35	1/4	15.0	5.85/6.00	1.4/1.8	0.3	6
7.00	-	15.0	6.50/6.65	1.4/1.8	0.3	6
8.00	5/16	15.0	7.50/7.65	1.4/1.8	0.3	6
8.00	5/16	18.0	7.50/7.65	1.8/2.2	0.3	6
9.00	-	18.0	8.50/8.65	1.8/2.2	0.3	6
9.52	3/8	18.0	9.05/9.15	1.8/2.2	0.3	6
10.00	-	18.0	9.50/9.65	1.8/2.2	0.3	6
12.00	-	18.0	11.50/11.65	1.8/2.2	0.3	6
8.00	5/16	21.0	7.50/7.65	1.9/2.3	0.3	6
10.00	-	21.0	9,50/9.65	1.9/2.3	0.3	6
11.10	7/16	21.0	10.55/10.70	1.9/2.3	0.3	6
12.00	-	21.0	11.50/11.65	1.9/2.3	0.3	6
12.70	1/2	21.0	12.20/12.35	1.9/2.3	0.3	6