


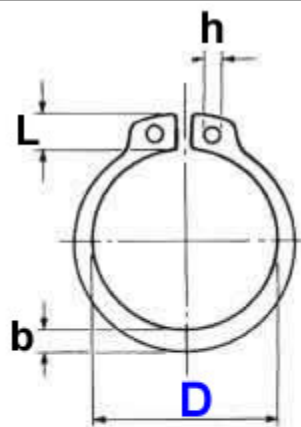


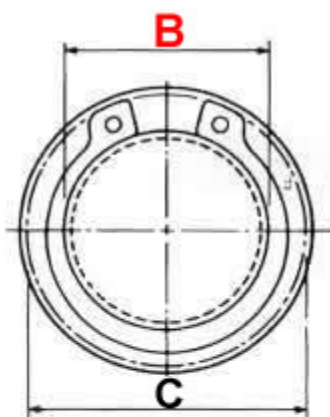


Patilla para medidas de 3 a 9 mm



Patilla alternativa para medidas de 4-8 mm

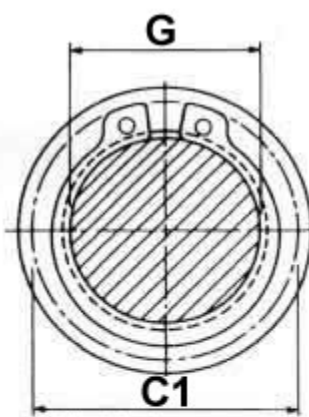

La mayoría de las medidas superiores a 185 mm son sin patillas

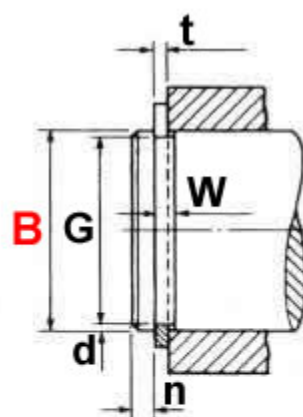

Configuración de la "base" de algunas de las medidas más grandes

Ranura (G)					Anillo circular (F)									Wt.	Tc
Tol.	w	Tol.	n (mínimo)	d ~	t espesor	Tol.	D	Tol.	C	C1	L (máximo)	b ~	h (mínimo)	(kg/k)	(N)
+0.00 -0.04	0.50		0.3	0.10	0.40	+0.00 -0.05	2.7	+0.04 -0.15	7.0	6.6	1.9	0.8	1.0	0.02	1170
	0.50		0.3	0.10	0.40		3.7		8.6	8.2	2.2	0.9	1.0	0.03	1600
+0.00 -0.048	0.70		0.3	0.10	0.60		4.7		10.3	9.8	2.5	1.1	1.0	0.08	2900
	0.80		0.5	0.15	0.70		5.6		11.7	11.1	2.7	1.3	1.2	0.13	4100
+0.00 -0.06	0.90	+0.14 -0.00	0.5	0.15	0.80		6.5	+0.06 -0.18	13.5	12.9	3.1	1.4	1.2	0.18	5500
	0.90		0.6	0.20	0.80		7.4		14.7	14.0	3.2	1.5	1.2	0.20	6200
	1.10		0.6	0.20	1.00		8.4		16.0	15.2	3.3	1.7	1.2	0.32	8800
	1.10		0.6	0.20	1.00		9.3		17.0	16.2	3.3	1.8	1.5	0.40	9700
+0.00 -0.11	1.10		0.8	0.25	1.00	+0.00 -0.06	10.2		18.0	17.1	3.3	1.8	1.5	0.41	10700
	1.10		0.8	0.25	1.00		11.0		19.0	18.1	3.3	1.8	1.7	0.45	11700
	1.10		0.9	0.30	1.00		11.9	+0.10 -0.36	20.2	19.2	3.4	2.0	1.7	0.52	12700
	1.10		0.9	0.30	1.00		12.9		21.4	20.4	3.5	2.1	1.7	0.56	13600
	1.10		1.1	0.35	1.00		13.8		22.6	21.5	3.6	2.2	1.7	0.62	14600
	1.10		1.2	0.40	1.00		14.7		23.8	22.6	3.7	2.2	1.7	0.69	15600
	1.10		1.2	0.40	1.00		15.7		25.0	23.8	3.8	2.3	1.7	0.77	16600
	1.30		1.5	0.50	1.20		16.5		26.2	24.8	3.9	2.4	2.0	0.99	21000
	1.30		1.5	0.50	1.20		17.5		27.2	25.8	3.9	2.5	2.0	1.10	22200
	1.30		1.5	0.50	1.20		18.5	+0.13 -0.42	28.4	27.0	4.0	2.6	2.0	1.18	23400
+0.00 -0.13	1.30		1.5	0.50	1.20		19.5		29.6	28.2	4.1	2.7	2.0	1.26	24500
	1.30		1.5	0.50	1.20		20.5		30.8	29.4	4.2	2.8	2.0	1.39	25700
	1.30		1.5	0.50	1.20		21.5		32.0	30.6	4.3	2.9	2.0	1.54	26900
	1.30		1.7	0.55	1.20		22.2	+0.21 -0.42	33.2	31.7	4.4	3.0	2.0	1.52	28000
+0.00 -0.21	1.30		1.7	0.55	1.20		23.2		34.2	32.7	4.4	3.0	2.0	1.70	29200
	1.30		1.7	0.55	1.20		24.2		35.5	33.9	4.5	3.1	2.0	1.75	30400

0.00 0.25	1.30		2.1	0.70	1.20		24.9		36.7	34.8	4.6	3.1	2.0	1.89	31600	
	1.60		2.1	0.70	1.50		25.9		37.9	36.0	4.7	3.2	2.0	2.47	40900	
	1.60		2.1	0.70	1.50		26.9		39.1	37.2	4.8	3.4	2.0	2.75	42400	
	1.60		2.1	0.70	1.50		27.9		40.5	38.6	5.0	3.5	2.0	2.93	43800	
	1.60		2.6	0.85	1.50		29.6	+0.25 -0.50	43.0	40.7	5.2	3.6	2.5	3.02	46700	
	1.60		2.6	0.85	1.50		30.5		44.0	41.7	5.2	3.7	2.5	3.30	48200	
	1.60		2.6	0.85	1.50		31.5		45.4	43.1	5.4	3.8	2.5	3.72	49700	
	1.60		3.0	1.00	1.50		32.2		46.8	44.2	5.6	3.9	2.5	3.78	51100	
	1.85		3.0	1.00	1.75		33.2	+0.39 -0.90	47.8	45.2	5.6	4.0	2.5	4.55	51400	
	1.85		3.0	1.00	1.75		35.2		50.2	47.6	5.8	4.2	2.5	5.08	54800	
	1.85		3.8	1.25	1.75		36.5		52.6	49.5	6.6	5.0	2.5	5.54	55600	
	1.85		3.8	1.25	1.75		38.5		55.7	52.5	6.5	5.0	2.5	5.99	59500	
	1.85		3.8	1.25	1.75		41.5		59.1	55.9	6.7	5.0	2.5	6.75	63700	
	1.85		3.8	1.25	1.75		42.5		60.1	56.9	6.7	5.0	2.5	7.24	65100	
	1.85		3.8	1.25	1.75		43.5		61.3	58.1	6.8	5.0	2.5	7.30	66500	
	1.85		3.8	1.25	1.75		44.5		62.5	59.3	6.9	5.0	2.5	7.51	67900	
	2.15		4.5	1.50	2.00	+0.00 -0.07	45.8	+0.46 -1.10	64.5	60.8	6.9	5.5	2.5	9.88	80300	
	2.15		4.5	1.50	2.00		47.8		66.7	63.0	7.0	5.5	2.5	9.53	84100	
0.00 0.30	2.15		4.5	1.50	2.00		49.8		69.0	65.2	7.1	5.5	2.5	10.30	87400	
	2.15		4.5	1.50	2.00		50.8		70.2	66.4	7.2	5.5	2.5	10.41	89000	
	2.15		4.5	1.50	2.00		51.8		71.6	67.6	7.3	5.5	2.5	10.50	90600	
	2.15		4.5	1.50	2.00		53.8		73.6	69.6	7.3	5.6	2.5	12.47	93800	
	2.15		4.5	1.50	2.00		55.8		75.6	71.8	7.4	5.8	2.5	13.69	97100	
	2.15		4.5	1.50	2.00		57.8		77.8	74.0	7.5	6.0	2.5	12.36	100000	
	2.15		4.5	1.50	2.00		58.8		79.0	75.2	7.6	6.2	2.5	13.10	102000	
	2.65		4.5	1.50	2.50		60.8		81.4	77.6	7.8	6.3	3.0	20.44	131000	
	2.65		4.5	1.50	2.50		62.5		83.6	79.8	7.9	6.4	3.0	20.43	135000	

0.00 0.30	2.65		4.5	1.50	2.50		63.5		84.4	81.0	8.0	6.5	3.0	19.55	138000	
	2.65		4.5	1.50	2.50		65.5		87.0	83.2	8.1	6.6	3.0	22.13	142000	
	2.65		4.5	1.50	2.50		67.5		89.2	85.4	8.2	6.8	3.0	21.60	146000	
	2.65		4.5	1.50	2.50		70.5		92.7	88.8	8.4	7.0	3.0	24.65	152000	
	2.65		4.5	1.50	2.50		72.5		94.9	91.0	8.5	7.2	3.0	24.26	156000	
	2.65		4.5	1.50	2.50		73.5		96.1	92.2	8.6	7.3	3.0	28.10	158000	
	2.65		5.3	1.75	2.50		74.5		98.1	93.7	8.6	7.4	3.0	26.68	162000	
	2.65		5.3	1.75	2.50		76.5		100.3	95.9	8.7	7.6	3.0	28.35	166000	
0.00 0.35	3.15		5.3	1.75	3.00	+0.00 -0.08	79.5		103.3	98.9	8.7	7.8	3.5	35.40	206000	
	3.15		5.3	1.75	3.00		82.5		106.5	102.0	8.8	8.0	3.5	39.85	214000	
	3.15		5.3	1.75	3.00		84.5		108.5	104.0	8.8	8.2	3.5	38.89	218000	
	3.15		5.3	1.75	3.00		89.5		114.8	111.0	9.4	8.6	3.5	42.39	231000	
	3.15		5.3	1.75	3.00		91.5		118.6	114.0	9.8	9.0	3.5	54.00	238000	
	3.15		5.3	1.75	3.00		94.5		120.2	116.0	9.6	9.0	3.5	48.86	243000	
0.00 0.54	4.15	+0.18 -0.00	6.0	2.00	4.00		95.0	+0.54 -1.30	122.4	118.0	9.7	9.2	3.5	68.73	330000	
	4.15		6.0	2.00	4.00		98.0		126.2	122.0	10.1	9.3	3.5	73.16	340000	
	4.15		6.0	2.00	4.00		100.0		129.0	124.0	10.0	9.5	3.5	83.45	349000	
	4.15		6.0	2.00	4.00		103.0		131.2	127.0	10.1	9.6	3.5	75.24	356000	
	4.15		6.0	2.00	4.00		108.0		137.3	133.0	10.6	9.8	3.5	78.65	327000	
	4.15		6.0	2.00	4.00		113.0		143.1	138.0	11.0	10.2	3.5	85.58	388000	
0.00 0.63	4.15		6.0	2.00	4.00	+0.00 -0.10	118.0		149.0	144.0	11.4	10.4	4.0	99.62	404000	
	4.15		6.0	2.00	4.00		123.0		154.4	150.0	11.6	10.7	4.0	98.10	421000	
	4.15		6.0	2.00	4.00		128.0		159.8	155.0	11.8	11.0	4.0	113.40	437000	
	4.15		6.0	2.00	4.00		133.0	+0.63 -1.50	165.2	160.0	12.0	11.2	4.0	119.18	453000	
	4.15		6.0	2.00	4.00		138.0		170.6	166.0	12.2	11.5	4.0	128.53	470000	
	4.15		7.5	2.50	4.00		142.0		177.3	171.0	13.0	11.8	4.0	132.80	455000	
	4.15		7.5	2.50	4.00		146.0		182.3	176.0	13.0	12.0	4.0	136.06	501000	

	4.15		7.5	2.50	4.00		151.0		188.0	182.0	13.3	12.2	4.0	137.50	518000	
	4.15		7.5	2.50	4.00		155.5		193.4	187.0	13.5	12.5	4.0	151.96	534000	
	4.15		7.5	2.50	4.00		160.5		198.4	192.0	13.5	12.9	4.0	169.00	550000	
	4.15		7.5	2.50	4.00		165.5		203.4	197.0	13.5	12.9	4.0	173.70	566000	
	4.15		7.5	2.50	4.00		170.5		210.0	204.0	14.2	13.5	4.0	188.00	582000	
	4.15		7.5	2.50	4.00		175.5		215.2	209.0	14.3	13.5	4.0	193.00	598000	
	4.15		7.5	2.50	4.00		180.5		220.0	214.0	14.2	14.0	4.0	203.00	615000	
	4.15		7.5	2.50	4.00		185.5		225.0	219.0	14.2	14.0	4.0	209.50	631000	
	4.15		7.5	2.50	4.00		190.5		230.0	224.0	14.2	14.0	4.0	214.00	647000	
0.00	5.15		9.0	3.00	5.00		193.0		235.0	228.0	14.2	14.0	4.0	278.00	721000	
0.72	5.15		9.0	3.00	5.00		198.0	+0.72	240.0	233.0	14.2	14.0	4.0	285.00	739000	
	5.15		9.0	3.00	5.00		208.0	-1.70	250.0	243.0	14.2	14.0	4.0	298.50	775000	
	5.15		9.0	3.00	5.00		218.0		260.0	253.0	14.2	14.0	4.0	312.00	809000	
	5.15		9.0	3.00	5.00		228.0		270.0	263.0	14.2	14.0	4.0	326.00	844000	
	5.15		9.0	3.00	5.00	+0.00	238.0	-0.12	280.0	272.0	14.2	14.0	4.0	340.00	880000	
	5.15		12.0	4.00	5.00		245.0		294.0	285.0	16.2	16.0	5.0	414.00	915000	
	5.15		12.0	4.00	5.00		255.0		304.0	295.0	16.2	16.0	5.0	430.50	950000	
0.00	5.15		12.0	4.00	5.00		265.0	+0.81	314.0	305.0	16.2	16.0	5.0	446.50	985000	
0.81	5.15		12.0	4.00	5.00		275.0	-2.00	324.0	315.0	16.2	16.0	5.0	463.00	1020000	
	5.15		12.0	4.00	5.00		285.0		334.0	325.0	16.2	16.0	5.0	479.00	1056000	
	6.20		15.0	5.00	6.00		293.0		352.2	341.0	20.2	20.0	6.0	710.50	1309000	
	6.20		15.0	5.00	6.00		303.0		362.2	351.1	20.2	20.0	6.0	734.00	1351000	
	6.20	+0.22	15.0	5.00	6.00		313.0		372.2	361.0	20.2	20.0	6.0	757.00	1393000	
0.00	6.20	-0.00	15.0	5.00	6.00	+0.00	323.0	+1.00	382.2	371.0	20.2	20.0	6.0	780.00	1436000	
0.89	6.20		15.0	5.00	6.00	-0.18	333.0	-2.50	392.2	381.0	20.2	20.0	6.0	805.00	1478000	
	6.20		15.0	5.00	6.00		343.0		402.2	391.0	20.2	20.0	6.0	827.00	1520000	
	6.20		15.0	5.00	6.00		353.0		412.2	401.0	20.2	20.0	6.0	850.00	1562000	

Ranura (G)					Anillo circular (F)										Wt.	Tc
Tol.	w	Tol.	n (mínimo)	d ~	t	Tol.	D	Tol.	C	C1	L (máximo)	b ~	h (mínimo)	(kg/k)		(N)

