




RESORTES

MADRIGAL



Material: Acero para resortes

Dureza: es de 45 a 53 HRC.

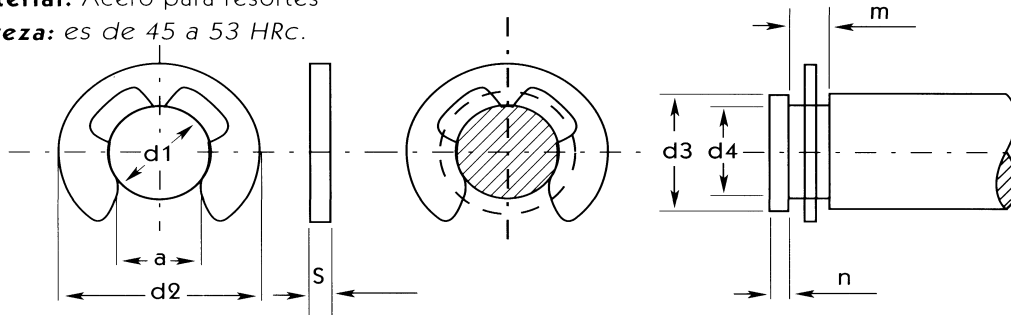

Denominación	d1	d2	a	S	Tolerancia	PESO Kgs 1000/ pzas	d3		d4	m	Tolerancia	n mín.	carga axial para d3 en	
							de	hasta					min	máx
1,5RS	1,5	4,0	1,28	0,4	±0,02	0,021	2,0	2,5	1,5	0,44	+0,02	0,8	7	12
1,9RS	1,9	4,5	1,61	0,5		0,040	2,5	3,0	1,9	0,54		1,0	10	20
2,3RS	2,3	6,0	1,94	0,6		0,070	3,0	4,0	2,3	0,64		1,0	14	32
3,2RS	3,2	7,0	2,70	0,6		0,190	4,0	5,0	3,2	0,64		1,0	20	45
4RS	4,0	9,0	3,34	0,7		0,158	5,0	7,0	4,0	0,74		1,2	30	65
5RS	5,0	11,0	4,11	0,7		0,234	6,0	8,0	5,0	0,74		1,2	40	75
6RS	6,0	12,0	5,26	0,7		0,255	7,0	9,0	6,0	0,74		1,2	50	100
7RS	7,0	14,0	5,84	0,9		0,474	8,0	11,0	7,0	0,94		1,5	60	120
8RS	8,0	16,0	6,52	1,0	+0,03	0,660	9,0	12,0	8,0	1,05	+0,06	1,8	70	170
9RS	9,0	18,5	7,63	1,1		1,000	10,0	14,0	9,0	1,15		2,0	80	200
10RS	10,0	20,0	8,32	1,2		1,120	11,0	15,0	10,0	1,25		2,0	90	220
12RS	12,0	23,0	10,45	1,3		1,770	13,0	18,0	12,0	1,35		2,5	100	240
15RS	15,0	29,0	12,61	1,5		3,370	16,0	24,0	15,0	1,55		3,0	130	300